



## 7" Quad Camera Display Instruction Sheet

Tech Support 1-800-265-1818  
http://usa.vdo.com


Instruction Sheet # A2C59519838

Rev.-

Read these instructions thoroughly before installation. Do not deviate from assembly. Always disconnect battery ground before making any electrical connections.

### Mounting Instructions

Apply four screws to the following locations to firmly mount the display to the vehicle

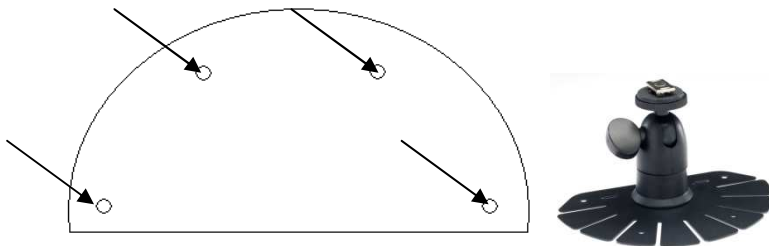

### Adjustment Instructions

The display can be adjusted by loosening the knob on the mounting bracket. Once the display is at the desired angle, retighten the knob until the display is secure.

### Adjusting the Display

Adjusting Display Settings:

- 1) Push the Menu button to display the options menu.
- 2) Scroll to the word "Image" using the "+" and "-" buttons. Then push the menu button again to select it.
- 3) Use this screen to adjust "Brightness", "Contrast", and "Color".
- 4) When the desired setting is highlighted use the "Menu" button again to select it.
- 5) On the next screen use the "+" and "-" buttons to adjust the image.
- 6) When finished adjusting, push the "Menu" button. Then scroll down and select "EXIT" to complete the changes.
- 7) The circulate function can be used once the camera times are set by pressing and holding the menu button for 2-3 seconds.

Merchandise warranted against defects in factory workmanship and materials for a period of 24 months after purchase. This warranty applies to the first retail purchaser and covers only those products exposed to normal use or service. Provisions of this warranty shall not apply to a VDO product used for a purpose for which it is not designed, or which has been altered in any way that would be detrimental to the performance or life of the products, or misapplication, misuse, negligence or accident. On any VDO part or VDO product found to be defective after examination by manufacturer, manufacturer will only repair or replace the merchandise through the original selling dealer. Manufacturer assumes no responsibility for diagnosis, removal and/or installation labor, loss of vehicle use, loss of time, inconvenience or any other consequential expenses. The warranties herein are in lieu of any other expressed or implied warranties, including any implied warranty or merchantability of fitness, and any other obligation on the part of manufacturer, or selling dealer.

### Parts List

Item	Description	Qty
1	7" Display (12/24V) DC	1
2	Mounting Bracket	1
3	Sun Shield	1
4	Mounting Kit	1
5	Instruction Sheet	1
6	Remote Control	1
7	Camera Wiring Harness	1
8	Mounting Pad	1

IMAGE  
VOLUME  
LANGUAGE  
MIRROR  
VIDEO  
TRIG DELAY  
CIRCULATE  
MODE [ ON ]  
EXIT

Adjusting Camera Views:

- 1) By pressing the "Mode" button the user can toggle through a quad camera display, a camera 1 and 2 split screen, a camera 3 and 4 split screen, and a 3 camera view
- 2) By pressing the "Cam Sel" button the user can toggle between the single camera views.

## **7" Quad Camera Display Instruction Sheet**

Tech Support 1-800-265-1818  
<http://usa.vdo.com>

Instruction Sheet # A2C59519838

Rev.-

### **Connection/Wiring Harness**

- 1) Connect the 13 pin female display cable to the 13 pin male camera wiring harness.
- 2) Use the following table as a reference for wiring the power, ground, and camera triggers.

<b>Wire Color</b>	<b>Description</b>
Red	Battery Constant (+12 / 24 V)
Black	Black - Ground
White	Camera 2 (Trigger)
Yellow	Camera 1 (Trigger)
Blue	Camera 3 (Trigger)
Green	Camera 4 (Trigger)

\*Trigger wires will activate the appropriate camera when 10V-30V is applied

- 3) Finally, take the 4 pin female camera connections and plug them into the 4 pin male connections coming from the camera wire harness. Make sure that the small groove on the camera connector lines up with the groove on the display wire harness.